


Specification sheet

XF 450

FAS 6X2 Rigid, double mounted trailing axle

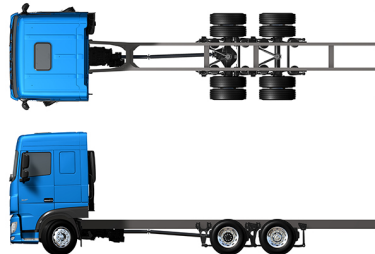

ENGINES

- XF 450 MX-11 (330 kW / 449 hp)
- XF 430 MX-13 (315 kW / 428 hp)
- XF 480 MX-13 (355 kW / 483 hp)
- XF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

26000 kg

Max. front 7000 kg

Max. rear 19000 kg

GCM²⁾

44000 kg

067F0729AAAA - 202345C - 21-08-2023

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Space Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2490 mm.; Cab suspension mechanical; LED daytime running lights; Front view mirror; Central door lock system, 2 keys, 2 RC units.

Optional

03710 Comfort Cab	09982 No auxiliary lights in the bumper
01760 Super Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights
08020 LED head lights	

AERODYNAMICS

Optional

08823 Adj. roof air deflector Space Cab; over 4 m (!)	06160 Fixed roof air deflector for Super Space Cab
06776 Adjustable roof air deflector	06904 Fixed rf deflector; total height over 4 m
08822 Adj. roof air deflector for Space Cab	04906 Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

07801 Cab steps and wing in cab colour	07901 Air intake grid cab colour
---	---

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Delta black; Driver seat: Comfort Air; Co-driver seat: basic; Lower bunk without drawer; Automatic Temperature Control and aircro; Auxiliary cab heater (water); Pollen filter.

Optional

09271 Steering wheel, leather, colour black	07743 Co-driver seat: Luxury Air
07240 Steering wheel, leather, Exclusive	07746 Co-driver seat: Super Air
07152 Cab interior trim colour Exclusive	07748 Co-driver seat: Xtra Leather Air
07592 Cab interior decoration Argenta	00967 Seat belts red
07591 Cab interior decoration Rustica	06539 Refrigerator
07733 Driver seat: Luxury Air	09603 Lower bunk with drawer 65 litres
07736 Driver seat: Super Air	06784 Lower bunk mattress Xtra Comfort
07737 Driver seat: Xtra Leather Air	06676 PL light in cab ceiling
07741 Co-driver seat: Comfort Air	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEBS-3.

Optional

09681 Preparation for Maut	06991 Predictive Cruise Control
07117 Radio/USB player, 2 speakers	06992 Predictive Cruise Control lite

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
07011 DAF Night Lock	01725 Reverse warning
09828 Front camera system	

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear: 12.00 + 7.80 t, air suspension, SR1344.

Optional

06257 Front axle load 9.00 t	04588 Rear axle SR1347
04647 Front springs air	00567 Rear axle load 10.00+ 10.00 t
04057 Rear axle HR1356	08191 Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

04523 Manual gearbox, 16 speeds	02314 Gearbox overdrive
07103 Automated gearbox, TraXon, 16 speeds	

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921 MX Engine Brake	04901 Spring brake cylinders on the first front axle
02715 ZF Intarder	

CHASSIS

Wheelbase 5.05 m / rear overhang 2.90 m; Side member height 260 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

02601 Side member height 310 mm	03323 Rear light with LEDs
07071 Spare wheel carrier right-hand side	

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

- 07033** Trailer coupling Ringfeder D=13.7 **08027** Trailer coupling Rockinger D=20.0
07034 Trailer coupling Ringfeder D=20.0 **04659** Trailer cable EBS
08026 Trailer coupling Rockinger D=13.0

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- 09050** Application connectors for bb remote control **02597** Application connector for tail lift control
06692 Application connector chassis

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 230 Ah..

Optional

- 06460** Alternator 120 A **07671** Batteries 2x210Ah AGM C-type
08775 Alternator 150 A

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 50000 kg class 3.

Optional

- 03673** Driveline related max GCM 44000 kg class 2 **00818** Driveline related max GCM 60000 kg class 3
00939 Driveline related max GCM 56000 kg class 2

APPLICATION CONDITIONS

Air intake front.

Optional

- 03647** Air intake high **03648** Cyclonic air intake high

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline up to 500,000 km and 1st year breakdown.; ITS service.

Optional



- 08311** Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XF 450

FAS 6X2 Rigid, double mounted trailing axle

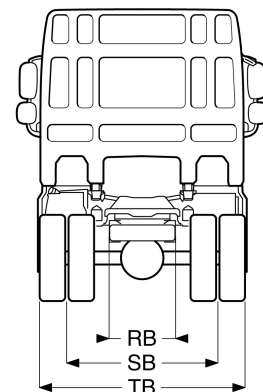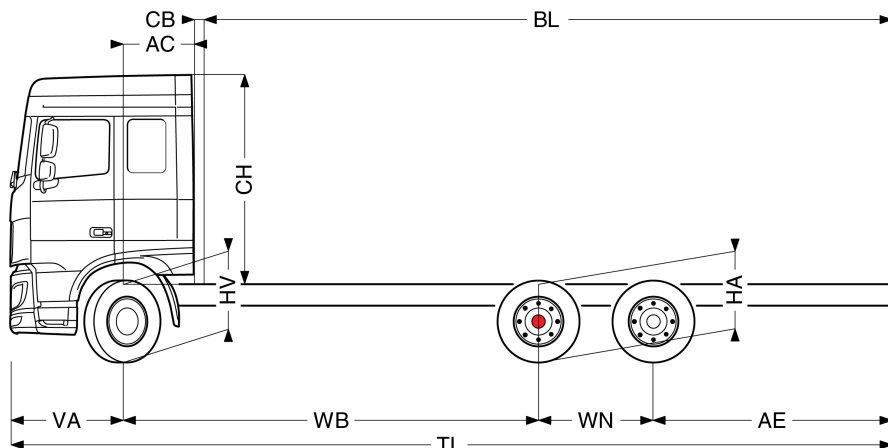

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SPACE CAB	4,20	2,20	4925	3734	8659	2075	15266	17341	0,88	0,10	2,51	5,95	6,32	9,17	1,02	0,99	15,96	17,37
	4,40	2,35	4938	3790	8729	2062	15210	17271	0,88	0,10	2,51	6,29	6,67	9,52	1,02	0,99	16,49	17,90
	4,60	2,55	4930	3807	8737	2070	15193	17263	0,88	0,10	2,51	6,17	6,55	9,92	1,02	0,98	16,98	18,39
	4,80	2,70	4931	3841	8772	2069	15159	17228	0,88	0,10	2,51	6,49	6,88	10,27	1,02	0,98	17,51	18,92
	5,05	2,90	4791	3821	8612	2209	15179	17388	0,88	0,10	2,56	7,31	7,74	10,72	0,97	0,94	18,19	19,62
	5,30	2,90	4806	3831	8636	2194	15169	17364	0,88	0,10	2,56	7,71	8,18	10,97	0,97	0,94	18,84	20,28
	5,90	2,80	4881	3920	8801	2119	15080	17199	0,88	0,10	2,51	8,75	9,26	11,47	1,02	0,99	20,41	21,86
SUPER SPACE CAB	4,20	2,20	5000	3734	8735	2000	15266	17265	0,88	0,10	2,89	5,99	6,36	9,17	1,02	0,99	15,96	17,37
	4,40	2,35	5014	3790	8805	1986	15210	17195	0,88	0,10	2,89	6,33	6,72	9,52	1,02	0,99	16,49	17,90
	4,60	2,55	5005	3807	8812	1995	15193	17188	0,88	0,10	2,89	6,21	6,59	9,92	1,02	0,98	16,98	18,39
	4,80	2,70	5006	3841	8848	1994	15159	17152	0,88	0,10	2,89	6,52	6,91	10,27	1,02	0,98	17,51	18,92
	5,05	2,90	4867	3821	8688	2133	15179	17312	0,88	0,10	2,94	7,34	7,78	10,72	0,97	0,94	18,19	19,62
	5,30	2,90	4881	3831	8712	2119	15169	17288	0,88	0,10	2,94	7,77	8,21	10,97	0,97	0,94	18,84	20,28
	5,90	2,80	4956	3921	8877	2044	15079	17123	0,88	0,10	2,89	8,78	9,31	11,47	1,02	0,99	20,41	21,86

OTHER DIMENSIONS VA: 1,37 WN: 1,40 HV¹²⁾: 0,97 HV¹³⁾: 0,94 RB: 0,79 SB: 1,82 TB¹⁴⁾: 2,48

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 5) CB is based on standard air intake and/or exhaust.
 6) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle (trailing axle down).
 9) Laden height at centre of driven axle(s).
 10) TK = turning circle between kerbs.
 11) TW = turning circle between walls.
 12) Unladen height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.