


Specification sheet

XB 190

FA 4X2 Rigid, 12t



ENGINES
XB NewGen 190 PX-5 (139 kW / 189 hp)
XB NewGen 210 PX-5 (153 kW / 208 hp)
XB NewGen 230 PX-7 (167 kW / 227 hp)
XB NewGen 260 PX-7 (189 kW / 257 hp)

GVM ¹⁾	GCM ²⁾
12000 kg	11990 kg
Max. front 4500 kg	
Max. rear 8500 kg	

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror; Rear view camera.

Optional

02576 Extended Day Cab	02083 Two hazard beacon lights LED
02106 Sleeper Cab	07343 Kerb view window co-driver door
01173 Cab suspension mechanical	00915 Side no glass / rear single glass
01605 Cab suspension mechanical reinforced	09101 Green tinted glass, heated
09983 Fog lights	03605 Mirror brackets, body 2.10-2.29 m
09984 Fog lights and cornering lights	09282 Mirror brackets, body 2.30-2.40 m
06629 Two hazard beacon lights	09283 Mirror brackets, body 2.40-2.50 m

AERODYNAMICS

Optional

09286 Roof air deflector prepared	07092 Adjustable roof air deflector low (set)
06776 Adjustable roof air deflector	09287 Side collars prepared
07109 Adjustable roof air deflector high (set)	07112 Side collars long (set)

COLOURS

; Head lamp panel and bumper: Stone Grey; Cab steps and wing Stone Grey; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	16153 Cab and chassis colours
01109 Cab steps and wing in cab colour	

CAB INTERIOR

Left-hand drive (LHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

01847 Right-hand drive (RHD)	04346 Lower bunk, normal level
09271 Steering wheel, leather, colour black	03703 Auxiliary cab heater Air Top 2000
03516 Pneumatically adjustable steering column	04246 Roof hatch, manual control
00967 Seat belts red	04258 Roof hatch, electric control
16158 Seat types	

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge version G2V2A; Driver Performance Assistant.

Optional

16155 Audio equipment, makes and types

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Drive-off Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	01723 No reverse warning
07414 Reverse warning with self-adjusting volume	16156 EC-ADR packages

SUSPENSION AND AXLES

Front axle type 45N. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 4.5 tonnes.; Single reduction driven rear axle type SR8.14 with parabolic leaf suspension, including shock absorbers and stabiliser. Max. load 8.50 tonnes..

Optional

00940 Rear: 8.50 t, asymmetric parabolic, SR8.14	01372 Rear springs air
00988 Rear: 8.50 t, air suspension, SR8.14	00369 Rear springs parabolic, asymmetric

WHEELS AND TYRES

Front axle(s): 245/70R17.5; Driven rear axle(s): 245/70R17.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764 Wheel protection rings black	16152 Tyre makes and types black
---	---

DRIVELINE

Engine PX-5, 4 cylinder diesel engine, 4.5 litres. Output 139 kW (189 hp) at 2300 rpm. Max. torque 745 Nm at 1200-1700 rpm.; Exhaust emission Euro 6; Automatic gearbox PowerLine, 8-speed; Gearbox ratio 4.89-0.64; Rear axle ratio 3.31.

Optional

08827 Manual gearbox, 6 speeds	02808 Rear axle ratio 4.56
09888 Automatic gearbox, 6 speeds	03042 Rear axle ratio 4.88
01879 Rear axle ratio 3.73	02843 Mechanical differential lock
02800 Rear axle ratio 4.10	

BRAKE SYSTEM

Exhaust brake.

Optional

06195 Park brake control with test position	09525 Park brake ctl with test pos and spoken warning
09524 Park brake control with spoken warning	

CHASSIS

Wheelbase 3.55 m / rear overhang 1.98 m; Side member height 210 mm; EAS unit right, discharge right rearward; Battery box left, no spare wheel carrier; Plastic fuel tank 110 l; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

04426 Batteries left, spare wheel carrier in re overhang	02011 Spare wheel carrier in rear overhang
04439 Battery box left, spare wheel carrier right	07071 Spare wheel carrier right-hand side
01623 Rear underrun protection	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

06779	Cross member D85-Dc70 -V25, no coupling, mounted	06657	Cross member D85-Dc70 -V25, coupling D85 B, mounted
02371	Cross member D85-Dc70 -V25, coupling D85 A, mounted	04661	D-value cross member D=8.5

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis; Standard body attachment hole pattern.

Optional

02950	Application connector for hydraulic platform	07487	Body attachment BAM 1, loose consoles supply
09240	Application connector for refuse coll. (EN1501-1)	07488	Body attachment BAM 3, loose consoles supply
01502	No side marker lights		

POWER TAKE-OFF (PTO)

Optional

06624	Indirect front engine PTO	02234	Rear eng PTO 13h, pump drive, wo cntr. max 30 kW
06785	Front engine PTO, generator preparation 22.5 kW	16148	PTO types and positions
06282	Rear eng PTO 13h, permanent, pump drive		

24V POWER SUPPLY

Alternator 100 A, batteries 2x 175 Ah..

Optional

02544	Alternator 80 A	01906	Batteries 2x125Ah
--------------	-----------------	--------------	-------------------

GVM AND GCM

Chassis weight related technical GVM max 11990 kg; Driveline related technical GCM equal to GVM.

Optional

08012	Chassis weight related technical GVM max 12000 kg	08629	Driveline related max GCM 22000 kg
00054	Driveline related max GCM 18000 kg	03700	Driveline related technical GCM = GVM+3500 kg
00728	Driveline related max GCM 20000 kg		

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

02270	Cold climate	04482	Air intake high behind cab
04767	Moisture separator, heated	09960	Air intake on the cab roof

VEHICLE DELIVERY

Standard toolkit.



Optional

06491	Toolkit Eastern Europe
--------------	------------------------

Go to **DAF.com** to configure your own perfect DAF.

XB 190

FA 4X2 Rigid, 12t

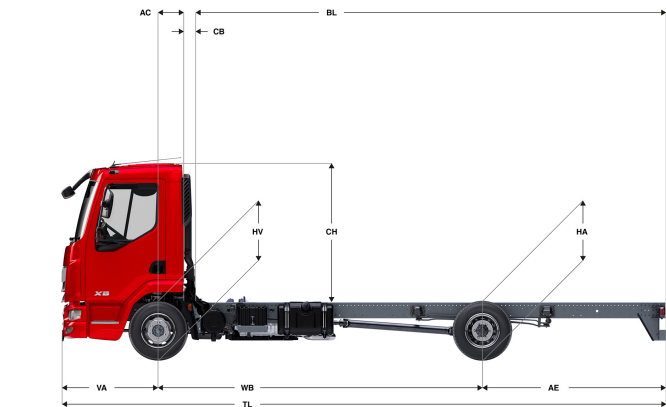

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	3,15	1,73	2526	1059	3585	1974	7441	8415	0,33	0,12	1,84	3,95	4,67	6,17	0,98	0,89	10,82	12,15
	3,55	1,98	2559	1100	3659	1941	7400	8341	0,33	0,12	1,84	4,58	5,40	6,82	0,98	0,89	11,79	13,15
	3,90	2,23	2561	1119	3680	1939	7381	8320	0,33	0,12	1,84	5,11	6,01	7,42	0,98	0,89	12,64	14,02
	4,30	2,43	2570	1141	3711	1930	7359	8289	0,33	0,12	1,84	5,74	6,73	8,02	0,98	0,90	13,62	15,01
	4,65	2,75	2571	1163	3735	1929	7337	8266	0,33	0,12	1,84	6,27	7,35	8,69	0,98	0,89	14,48	15,89
	5,00	2,83	2581	1173	3754	1919	7327	8246	0,33	0,12	1,84	6,82	7,97	9,12	0,98	0,90	15,34	16,76
	5,40	2,43	2606	1160	3767	1894	7340	8234	0,33	0,12	1,84	7,45	8,72	9,12	0,98	0,93	16,32	17,75
	5,70	2,41	2620	1169	3789	1880	7331	8211	0,33	0,12	1,84	7,93	9,27	9,40	0,98	0,93	17,06	18,50
	6,10	2,65	2627	1189	3816	1873	7311	8184	0,33	0,12	1,84	8,55	9,98	10,04	0,98	0,93	18,05	19,50
6,40	2,80	2635	1207	3842	1865	7293	8158	0,33	0,12	1,84	9,03	10,53	10,49	0,98	0,93	18,79	20,25	
6,70	3,00	2641	1228	3869	1859	7272	8131	0,33	0,12	1,84	9,49	11,06	10,99	0,98	0,93	19,54	21,00	
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	3,55	1,98	2701	1082	3783	1799	7418	8217	0,73	0,07	1,87	3,97	4,81	6,82	0,98	0,88	11,79	13,15
	3,90	2,23	2701	1103	3804	1799	7397	8196	0,73	0,07	1,87	4,52	5,44	7,42	0,98	0,88	12,64	14,02
	4,30	2,43	2709	1126	3835	1791	7374	8165	0,73	0,07	1,87	5,14	6,15	8,02	0,98	0,88	13,62	15,01
	4,65	2,75	2708	1150	3859	1792	7350	8142	0,73	0,07	1,87	5,69	6,78	8,69	0,98	0,88	14,48	15,89
	5,00	2,83	2717	1160	3878	1783	7340	8122	0,73	0,07	1,87	6,24	7,42	9,12	0,98	0,89	15,34	16,76
	5,40	2,43	2742	1149	3891	1758	7351	8110	0,73	0,07	1,87	6,90	8,18	9,12	0,98	0,92	16,32	17,75
	5,70	2,41	2755	1158	3913	1745	7342	8087	0,73	0,07	1,87	7,38	8,74	9,40	0,98	0,92	17,06	18,50
	6,10	2,65	2761	1179	3940	1739	7321	8060	0,73	0,07	1,87	8,01	9,46	10,04	0,98	0,92	18,05	19,50
	6,40	2,80	2768	1198	3966	1732	7302	8034	0,73	0,07	1,87	8,48	10,01	10,49	0,98	0,93	18,79	20,25
6,70	3,00	2774	1219	3993	1726	7281	8007	0,73	0,07	1,87	8,97	10,57	10,99	0,98	0,92	19,54	21,00	

OTHER DIMENSIONS	VA: 1,29	HV ¹³⁾ : 0,92	HV ¹⁴⁾ : 0,86	RB: 0,86	SB: 1,75	TB ¹⁵⁾ : 2,33
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.