


Specification sheet

XB 190

FA 4X2 Rigid, 14t



067F4802AAAA - 202545A - 10-07-2025

ENGINES
XB NewGen 190 PX-5 (139 kW / 189 hp)
XB NewGen 210 PX-5 (153 kW / 208 hp)
XB NewGen 230 PX-7 (167 kW / 227 hp)
XB NewGen 260 PX-7 (189 kW / 257 hp)
XB NewGen 290 PX-7 (212 kW / 287 hp)

GVM ¹⁾	GCM ²⁾
14000 kg	14000 kg
Max. front 5000 kg	
Max. rear 9400 kg	

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror; Rear view camera.

Optional

02576 Extended Day Cab	02083 Two hazard beacon lights LED
02106 Sleeper Cab	07343 Kerb view window co-driver door
03175 Cab suspension rubber and mechanical	00915 Side no glass / rear single glass
01605 Cab suspension mechanical reinforced	09101 Green tinted glass, heated
09983 Fog lights	09282 Mirror brackets, body 2.30-2.40 m
09984 Fog lights and cornering lights	09283 Mirror brackets, body 2.40-2.50 m
06629 Two hazard beacon lights	

AERODYNAMICS

Optional

09286 Roof air deflector prepared	07092 Adjustable roof air deflector low (set)
06776 Adjustable roof air deflector	09287 Side collars prepared
07109 Adjustable roof air deflector high (set)	07112 Side collars long (set)

COLOURS

; Head lamp panel and bumper: Stone Grey; Lower step cover, cab steps and wing Stone Grey.; Chassis colour grey..

Optional

06150 Solid cab colour	06485 Head lamp panel and bumper: cab colour
01162 Cab colour H3279 Brilliant White	00733 Lower step cab colour, cab steps and wing Grey
00061 Special solid cab colour	00617 Lower step cover, cab steps and wing in cab colour
06151 Cab metallic colour	16153 Cab and chassis colours
04431 Special metallic cab colour	

CAB INTERIOR

Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

09271 Steering wheel, leather, colour black	00967 Seat belts red
03516 Pneumatically adjustable steering column	04346 Lower bunk, normal level
03376 Dual mate seat, vinyl	03703 Auxiliary cab heater Air Top 2000
00072 Dual mate seat, velour	04246 Roof hatch, manual control
02600 Co-driver seat: air suspended	04258 Roof hatch, electric control
09106 Dual mate seat, luxury version	

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge version G2V2A; Driver Performance Assistant.

Optional

16155 Audio equipment, makes and types

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Drive-off Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	16156 EC-ADR packages
--	------------------------------

SUSPENSION AND AXLES

Front axle type F60. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 6.0 tonnes.; Single reduction driven rear axle type SR10.14 with parabolic leaf suspension, including shock absorbers and stabiliser. Max. load 9.80 tonnes..

Optional

02521 Rear: 9.80 t, parabolic, SR10.15	02515 Rear: 9.80 t, air suspension, SR10.15
02264 Rear: 9.80 t, air suspension, SR10.14	01372 Rear springs air

WHEELS AND TYRES

Front axle(s): 265/70R19.5; Driven rear axle(s): 265/70R19.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764 Wheel protection rings black	16152 Tyre makes and types
---	-----------------------------------

DRIVELINE

Engine PX-5, 4 cylinder diesel engine, 4.5 litres. Output 139 kW (189 hp) at 2300 rpm. Max. torque 745 Nm at 1200-1700 rpm.; Exhaust emission Euro 6; Automatic gearbox PowerLine, 8-speed; Gearbox ratio 4.89-0.64; Rear axle ratio 4.10.

Optional

08827 Manual gearbox, 6 speeds	02810 Rear axle ratio 4.11
04393 Manual gearbox, 9 speeds	02808 Rear axle ratio 4.56
09888 Automatic gearbox, 5 speeds	00743 Rear axle ratio 4.63
02313 Gearbox direct drive	08126 Rear axle ratio 5.29
01878 Rear axle ratio 3.31	03431 Rear axle ratio 5.57
03672 Rear axle ratio 3.36	02878 Rear axle ratio 6.17
03702 Rear axle ratio 3.70	02843 Mechanical differential lock
01879 Rear axle ratio 3.73	

BRAKE SYSTEM

Exhaust brake.

Optional

06195 Park brake control with test position	09525 Park brake ctl with test pos and spoken warning
09524 Park brake control with spoken warning	

CHASSIS

Wheelbase 3.50 m / rear overhang 1.85 m; Side member height 270 mm; EAS unit right, discharge right rearward; Battery box left, no spare wheel carrier; Plastic fuel tank 170 l; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

04439 Battery box left, spare wheel carrier right	07071 Spare wheel carrier right-hand side
01623 Rear underrun protection	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

06779 Cross member D85-Dc70 -V25, no coupling, mounted	02385 Cross member D137 + Ringfeder cplg D200 A, mounted
03417 Cross member D137-Dc92-V40, no coupling, mounted	02639 Cross member D137 + Ringfeder cplg D200 B, mounted
02371 Cross member D85-Dc70 -V25, coupling D85 A, mounted	04661 D-value cross member D=8.5
06657 Cross member D85-Dc70 -V25, coupling D85 B, mounted	07029 D-value cross member D=13.7

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis; Standard body attachment hole pattern.

Optional

02950 Application connector for hydraulic platform	07487 Body attachment BAM 1, loose consoles supply
09240 Application connector for refuse coll. (EN1501-1)	07488 Body attachment BAM 3, loose consoles supply
01502 No side marker lights	

POWER TAKE-OFF (PTO)

Optional

06624 Indirect front engine PTO	06282 Rear eng PTO 13h, permanent, pump drive
00590 Front engine PTO with generator preparation 17 kW	02234 Rear eng PTO 13h, pump drive, wo cntr. max 30 kW
06785 Front engine PTO, generator preparation 22.5 kW	16148 PTO types and positions
01250 Front engine PTO with generator preparation 30 kW	

24V POWER SUPPLY

Optional

02544 Alternator 80 A	01906 Batteries 2x125Ah
------------------------------	--------------------------------

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

02270 Cold climate	04482 Air intake high behind cab
04767 Moisture separator, heated	09960 Air intake on the cab roof

VEHICLE DELIVERY

Standard toolkit.



Optional

06491 Toolkit Eastern Europe

Go to **DAF.com** to configure your own perfect DAF.

XB 190

FA 4X2 Rigid, 14t

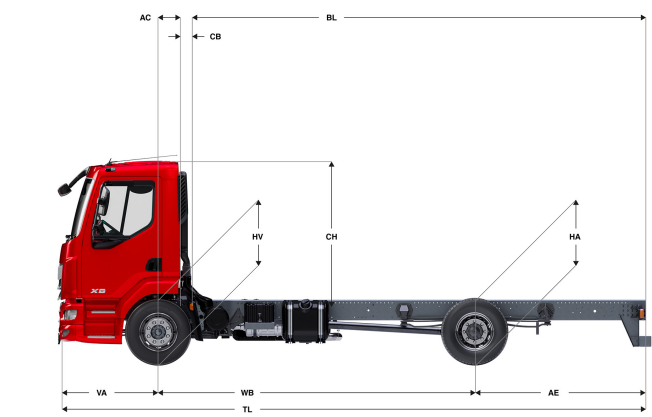

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	3,25	1,70	2808	1354	4161	2192	8046	9839	0,28	0,12	1,88	4,27	4,55	6,29	1,09	0,98	11,37	12,59
	3,50	1,85	2828	1395	4223	2172	8005	9777	0,28	0,12	1,88	4,66	4,97	6,69	1,09	0,98	11,99	13,22
	3,80	2,03	2830	1410	4241	2170	7990	9760	0,28	0,12	1,88	5,12	5,46	7,17	1,09	0,98	12,73	13,98
	4,20	2,27	2833	1433	4266	2167	7967	9734	0,28	0,12	1,88	5,74	6,12	7,81	1,09	0,98	13,72	14,99
	4,50	2,45	2842	1460	4302	2158	7940	9698	0,28	0,12	1,88	6,22	6,61	8,29	1,09	0,98	14,46	15,75
	4,80	2,63	2845	1477	4322	2155	7923	9678	0,28	0,12	1,88	6,68	7,10	8,77	1,09	0,98	15,21	16,51
	5,35	2,96	2862	1518	4380	2138	7882	9620	0,28	0,12	1,88	7,54	8,02	9,65	1,09	0,98	16,58	17,90
	5,90	3,29	2874	1560	4434	2126	7840	9566	0,28	0,12	1,88	8,40	8,93	10,53	1,09	0,98	17,95	19,29
	6,30	3,53	2879	1582	4461	2121	7818	9539	0,28	0,12	1,88	9,01	9,58	11,17	1,09	0,98	18,96	20,30
6,70	2,90	2974	1642	4616	2026	7758	9385	0,28	0,12	1,88	9,73	10,34	10,94	1,09	1,00	19,96	21,31	
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
SLEEPER CAB	3,25	1,70	2927	1373	4300	2073	8027	9700	0,68	0,07	1,88	3,63	3,91	6,29	1,09	0,97	11,37	12,59
	3,50	1,85	2949	1413	4362	2051	7987	9638	0,68	0,07	1,88	4,03	4,33	6,69	1,09	0,97	11,99	13,22
	3,80	2,03	2952	1427	4379	2048	7973	9621	0,68	0,07	1,88	4,50	4,84	7,17	1,09	0,97	12,73	13,98
	4,20	2,27	2956	1448	4405	2044	7952	9595	0,68	0,07	1,88	5,12	5,50	7,81	1,09	0,97	13,72	14,99
	4,50	2,45	2966	1474	4441	2034	7926	9559	0,68	0,07	1,88	5,60	6,00	8,29	1,09	0,98	14,46	15,75
	4,80	2,63	2970	1491	4461	2030	7909	9539	0,68	0,07	1,88	6,08	6,50	8,77	1,09	0,98	15,21	16,51
	5,35	2,96	2988	1531	4519	2012	7869	9481	0,68	0,07	1,88	6,95	7,42	9,65	1,09	0,98	16,58	17,90
	5,90	3,29	3001	1571	4573	1999	7829	9427	0,68	0,07	1,88	7,81	8,35	10,53	1,09	0,98	17,95	19,29
	6,30	3,53	3007	1592	4599	1993	7808	9401	0,68	0,07	1,88	8,44	9,02	11,17	1,09	0,98	18,96	20,30
6,70	2,90	3103	1651	4754	1897	7749	9246	0,68	0,07	1,88	9,17	9,79	10,94	1,09	1,00	19,96	21,31	

OTHER DIMENSIONS	VA: 1,34	HV ¹³⁾ : 1,01	HV ¹⁴⁾ : 0,94	RB: 0,79	SB: 1,75	TB ¹⁵⁾ : 2,35
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

A PACCAR COMPANY

DRIVEN BY QUALITY

DAF

067F4802AAAA - 202545A - 10-07-2025