


Specification sheet

XF 430

FAD 8X4 Rigid

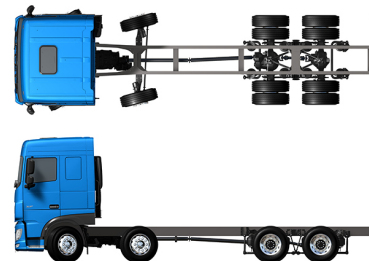

ENGINES

- XF 430 MX-13 (315 kW / 428 hp)
- XF 480 MX-13 (355 kW / 483 hp)
- XF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

33000 kg

Max. front 14000 kg

Max. rear 20000 kg

GCM²⁾

44000 kg

067F0779AAAA - 202345C - 21-08-2023

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Space Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2490 mm.; Cab suspension mechanical; LED daytime running lights; Front view mirror; Central door lock system, 2 keys, 2 RC units.

Optional

03710 Comfort Cab	09982 No auxiliary lights in the bumper
01760 Super Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights
08020 LED head lights	

AERODYNAMICS

Optional

08823 Adj. roof air deflector Space Cab; over 4 m (!)	06904 Fixed rf deflector; total height over 4 m
06776 Adjustable roof air deflector	04906 Side collars
08822 Adj. roof air deflector for Space Cab	

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

07801 Cab steps and wing in cab colour	07901 Air intake grid cab colour
---	---

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Delta black; Driver seat: Comfort Air; Co-driver seat: basic; Lower bunk without drawer; Automatic Temperature Control and aircio; Auxiliary cab heater (water); Pollen filter.

Optional

09271 Steering wheel, leather, colour black	07743 Co-driver seat: Luxury Air
07240 Steering wheel, leather, Exclusive	07746 Co-driver seat: Super Air
07152 Cab interior trim colour Exclusive	07748 Co-driver seat: Xtra Leather Air
07592 Cab interior decoration Argenta	00967 Seat belts red
07591 Cab interior decoration Rustica	06539 Refrigerator
07733 Driver seat: Luxury Air	09603 Lower bunk with drawer 65 litres
07736 Driver seat: Super Air	06784 Lower bunk mattress Xtra Comfort
07737 Driver seat: Xtra Leather Air	06676 PL light in cab ceiling
07741 Co-driver seat: Comfort Air	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control.

Optional

09681 Preparation for Maut	08023 Adaptive Cruise Control with FCW and AEBs-3
07117 Radio/USB player, 2 speakers	06991 Predictive Cruise Control
09909 Adaptive Cruise Control (ACC) with FCW	06992 Predictive Cruise Control lite

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
07011 DAF Night Lock	01725 Reverse warning
09828 Front camera system	

SUSPENSION AND AXLES

Front axles load 8.00 + 8.00 t; Rear: 2x 10.50 t, trapezium, HR1670T.

Optional

06264 Front axles load 9.00 + 9.00 t	04563 Rear axle load 13.00+ 13.00 t
02788 Rear axle SR1360T	08191 Axle load monitoring
01372 Rear springs air	

WHEELS AND TYRES

Front axle(s): 315/80R22.5; Second front or leading axle: 315/80R22.5; Driven rear axle(s): 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 315 kW (428 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 12.92-0.77; Rear axle ratio 3.46.

Optional

04523 Manual gearbox, 16 speeds	02313 Gearbox direct drive
07103 Automated gearbox, TraXon, 16 speeds	03720 No ASR

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes at front, rear tandem axle with drum brakes. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921 MX Engine Brake	02715 ZF Intarder
------------------------------	--------------------------

CHASSIS

Wheelbase 5.70 m / rear overhang 2.55 m; Side member height 310 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

07070 Spare wheel carrier left-hand side	03323 Rear light with LEDs
---	-----------------------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

- | | |
|--|--|
| 07033 Trailer coupling Ringfeder D=13.7 | 08027 Trailer coupling Rockinger D=20.0 |
| 07034 Trailer coupling Ringfeder D=20.0 | 04659 Trailer cable EBS |
| 08026 Trailer coupling Rockinger D=13.0 | |

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | |
|---|--|
| 09050 Application connectors for bb remote control | 06692 Application connector chassis |
|---|--|

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 230 Ah..

Optional

- | | |
|-------------------------------|---|
| 06460 Alternator 120 A | 07671 Batteries 2x210Ah AGM C-type |
| 08775 Alternator 150 A | |

GVM AND GCM

Chassis weight related technical GVM max 35000 kg; Driveline related max GCM 58000 kg class 2.

Optional

- | | |
|---|---|
| 00818 Driveline related max GCM 60000 kg class 3 | 01313 Driveline related max GCM 70000 kg class 2 |
| 00157 Driveline related max GCM 61000 kg class 2 | 02135 Driveline related max GCM 71000 kg class 2 |
| 06280 Driveline related max GCM 63000 kg class 2 | 02143 Driveline related max GCM 78000 kg class 2 |

APPLICATION CONDITIONS

Air intake high.

Optional

- | | |
|-------------------------------|---------------------------------------|
| 03646 Air intake front | 03648 Cyclonic air intake high |
|-------------------------------|---------------------------------------|

SERVICE AND MAINTENANCE



Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline up to 300,000 km and 1st year breakdown.; ITS service.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XF 430

FAD 8X4 Rigid

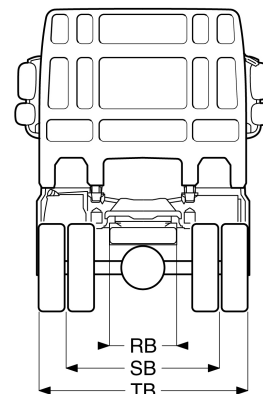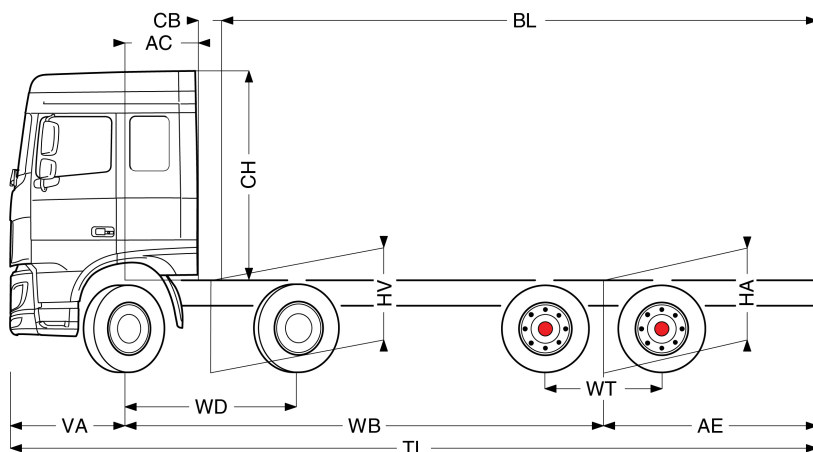

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
SPACE CAB	5,30	2,10	7195	3333	10527	6805	16667	22473	0,88	0,28	2,51	5,23	5,90	8,77	1,16	1,10	19,12	20,42
	5,70	2,55	7107	3528	10634	6893	16472	22366	0,88	0,28	2,51	5,68	6,43	9,62	1,16	1,10	20,29	21,60
	6,40	2,95	7030	3755	10786	6970	16245	22214	0,88	0,28	2,51	6,51	7,38	10,72	1,16	1,10	22,32	23,65
SUPER SPACE CAB	5,30	2,10	7290	3313	10603	6710	16687	22397	0,88	0,28	2,89	5,24	5,93	8,77	1,16	1,10	19,12	20,42
	5,70	2,55	7200	3510	10710	6800	16490	22290	0,88	0,28	2,89	5,71	6,46	9,62	1,16	1,10	20,29	21,60
	6,40	2,95	7121	3740	10861	6879	16260	22139	0,88	0,28	2,89	6,55	7,42	10,72	1,16	1,10	22,32	23,65

OTHER DIMENSIONS VA: 1,37 WD: 2,05 WT: 1,40 HV¹²⁾: 1,09 HV¹³⁾: 1,04 RB: 0,79 SB: 1,82 TB¹⁴⁾: 2,48

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 5) CB is based on standard air intake and/or exhaust.
 6) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).
 9) Laden height at centre of driven axle(s).
 10) TK = turning circle between kerbs.
 11) TW = turning circle between walls.
 12) Unladen height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.