


Specification sheet

CF 210

FAN 6X2 Rigid, Batt.ElectricVehicle



ENGINES

CFBEV rnal (mbusti / No hp listing)

GVM¹⁾

27000 kg

GCM²⁾

37000 kg

Max. front 8000 kg

Max. rear 19398 kg

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

02106 Sleeper Cab	09983 Fog lights
01137 Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights

AERODYNAMICS

Optional

06776 Adjustable roof air deflector	04906 Side collars
--	---------------------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	09933 Head lamp panel and bumper: Stone Grey
---	---

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Argenta; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch glass, manual control.

Optional

09271 Steering wheel, leather, colour black	07746 Co-driver seat: Super Air
07240 Steering wheel, leather, Exclusive	07748 Co-driver seat: Xtra Leather Air
07152 Cab interior trim colour Exclusive	00967 Seat belts red
07591 Cab interior decoration Rustica	02117 Third seat
07733 Driver seat: Luxury Air	06539 Refrigerator
07736 Driver seat: Super Air	06783 Lower bunk foam mattress
07737 Driver seat: Xtra Leather Air	06784 Lower bunk mattress Xtra Comfort
07741 Co-driver seat: Comfort Air	06676 PL light in cab ceiling
07743 Co-driver seat: Luxury Air	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control with FCW and AEBS.

Optional

09681 Preparation for Maut	07117 Radio/USB player, 2 speakers
08450 Luxury speaker system with 6 speakers	

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
09828 Front camera system	01725 Reverse warning

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear: 12.00 + 7.40 t, air suspension, HR1356.

Optional

06257 Front axle load 9.00 t	08191 Axle load monitoring
04647 Front springs air	

WHEELS AND TYRES

Front axle(s): 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

No engine.; Battery Electric Vehicle; Rear axle ratio 7.21.

BRAKE SYSTEM

Ventilated disc brakes front and drum brakes rear. Dual circuit air system with electronic control (EBS). Electric driven, water cooled air compressor..

Optional

04901 Spring brake cylinders on the first front axle

CHASSIS

Wheelbase 4.20 m / rear overhang 2.40 m; Side member height 310 mm; Standard component location; No fuel tank; Front underrun protection (FUP); Spray suppression.

Optional

03322 Rear light with bulbs

DRAWBAR AND TRAILER EQUIPMENT

Closing member.

Optional

07033 Trailer coupling Ringfeder D=13.7	08027 Trailer coupling Rockinger D=20.0
07034 Trailer coupling Ringfeder D=20.0	07029 D-value cross member D=13.7
08026 Trailer coupling Rockinger D=13.0	07032 D-value cross member D=20

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

24V POWER SUPPLY

2x225Ah battery box without battery; no alternator..

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 37000 kg class 3.



SERVICE AND MAINTENANCE

Warranty Plus - Battery Electric Vehicle, takes care of 2 years complete vehicle (excl. real wear parts), up to 240,000 km and 1st year breakdown.; ITS service.

Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

CF 210

FAN 6X2 Rigid, Batt.ElectricVehicle

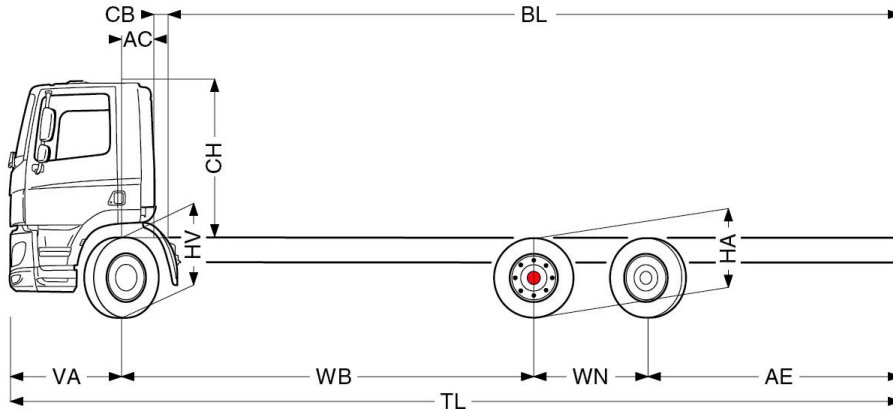

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	3,80	2,05	4352	5866	10218	3648	13532	16782	0,39	0,18	1,94	5,66	5,84	8,62	1,02	0,99	13,50	14,85
	4,20	2,40	4511	5767	10278	3489	13631	16722	0,39	0,18	1,94	6,37	6,57	9,37	1,02	0,99	14,53	15,90
	4,60	2,75	4682	5754	10436	3318	13643	16564	0,39	0,18	1,94	7,07	7,30	10,12	1,02	0,99	15,57	16,96
	4,80	2,90	4748	5720	10469	3252	13677	16531	0,39	0,18	1,94	7,45	7,68	10,47	1,02	0,99	16,09	17,48
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,20	2,40	4545	5778	10323	3455	13620	16677	0,82	0,00	1,94	5,88	6,08	9,37	1,02	0,98	14,53	15,90
	4,60	2,75	4717	5764	10482	3283	13633	16518	0,82	0,00	1,94	6,59	6,83	10,12	1,02	0,98	15,57	16,96
	4,80	2,90	4784	5730	10514	3216	13667	16486	0,82	0,00	1,94	6,96	7,19	10,47	1,02	0,98	16,09	17,48
SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,20	2,40	4656	5780	10436	3344	13618	16564	0,82	0,00	2,62	5,92	6,14	9,37	1,02	0,98	14,53	15,90
	4,60	2,75	4829	5766	10595	3171	13631	16405	0,82	0,00	2,62	6,65	6,89	10,12	1,02	0,98	15,57	16,96
	4,80	2,90	4895	5732	10627	3105	13666	16373	0,82	0,00	2,62	7,01	7,26	10,47	1,02	0,98	16,09	17,48

OTHER DIMENSIONS VA: 1,37 WN: 1,40 HV¹³⁾: 1,03 HV¹⁴⁾: 1,01 RB: 0,79 SB: 1,82 TB¹⁵⁾: 2,48

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 0 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle (trailing axle down).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.