


Specification sheet

XD 300

FAS 6X2 Rigid, double mounted trailing axle



ENGINES
XD NewGen 300 MX-11 (220 kW / 299 hp)
XD NewGen 340 MX-11 (251 kW / 341 hp)
XD NewGen 370 MX-11 (270 kW / 367 hp)
XD NewGen 410 MX-11 (300 kW / 408 hp)
XD NewGen 450 MX-11 (330 kW / 449 hp)

GVM ¹⁾	GCM ²⁾
26000 kg	38000 kg
Max. front 7000 kg	
Max. rear 19000 kg	

067F0121AAAA - 202501H - 18-09-2024

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Corner View.

Optional

07018 Sleeper Cab	01836 LED Skylights
06244 Sleeper High Cab	00949 LED Skylights; aux. LED lights on cab rf, prepared
02889 Chassis front execution: no bottom plate	01925 Two LED work lamps for cab rear wall
02952 Chassis front execution: bottom plate aero	01891 Hazard beacons on cab front, prepared
07586 Chassis front execution: robust	06629 Two hazard beacon lights
01226 Cab suspension air	03232 Front windscreen with solar control foil
03358 External sun visor	03317 Rear window: double glass
03922 Fog lights front	07343 Kerb view window co-driver door
00936 Auxiliary LED lights on cab roof, prepared	01362 DAF Digital Vision System

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00082 Adj. roof air deflector for Day Cab
01538 Adj. roof air defl. long high >4m(!) Sleeper High	00097 Adj. roof air deflector for Sleeper Cab
02662 Adj. roof air defl. long mid XD Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	02117 Third seat
02355 Steering wheel, leather	02837 Dashboard table
02353 Cab interior decoration: Argenta	03948 Single drawer
02350 Cab interior decoration: Natura	03954 Refrigerator
07733 Driver seat: Luxury Air	02838 Foam mattress for lower bunk
07736 Driver seat: Super Air	02854 Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air	01775 Xtra Comfort mattress with topper for lower bunk
09541 Arm rest driver seat	06970 Automatic Cab Climate Control
01740 Arm rest at both sides of the driver seat	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	06991 Predictive Cruise Control
03470 DAF Infotainment System: Exclusive, prepared	06992 Predictive Cruise Control lite
01915 DAF Infotainment System: Luxury Plus	

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADR
06410 Safe Load Pass preparation	

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: 20.00 t, air suspension, SR1344; Trailing axle load 10.0t; Lifting device.

Optional

06257 Front axle load 9.00 t	04057 Rear axle HR1356
06095 Front axle load 10.00 t	04588 Rear axle SR1347
04647 Front springs air	08191 Axle load monitoring

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P; R2,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 220 kW (299 hp) at 1600 rpm. Max. torque 1450 Nm at 900-1400 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX1810 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.08.

Optional

07110 Eco performance	08371 Long Combination Vehicle (LCV)
02313 Gearbox direct drive	09638 Off-road applications
01514 Urge-to-move	01498 Off-road applications with Rock-free function
07101 Standard transport, Lite version	02843 Mechanical differential lock
09637 Liquid transport	

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

09921	MX Engine Brake	01497	Park brake control pneumatic with spoken warning
02715	ZF Intarder	04901	Spring brake cylinders on the first front axle
01572	Park brake control electro-pneumatic	00929	Driven rear axle with drum brakes

CHASSIS

Wheelbase 4.60 m / rear overhang 2.75 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

02601	Side member height 310 mm	07071	Spare wheel carrier right-hand side
16157	Fuel tanks, material and sizes	03323	Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	04659	Trailer cable EBS
08026	Trailer coupling Rockinger D=13.0		

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

02729	Application connector Plug & Play	08121	Tail lift application
09421	Additional spare wiring		

POWER TAKE-OFF (PTO)

Optional

16148	PTO types and positions
-------	-------------------------

24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

Optional

04492	Alternator 130 A	07671	Batteries 2x210Ah AGM C-type
08775	Alternator 150 A	06440	Batteries 2x230Ah
08797	Batteries 2x175Ah		

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 38000 kg class 2.

Optional

00209	Driveline related max GCM 40000 kg class 3	00939	Driveline related max GCM 56000 kg class 2
03673	Driveline related max GCM 44000 kg class 2	00818	Driveline related max GCM 60000 kg class 3
03675	Driveline related max GCM 50000 kg class 3		

APPLICATION CONDITIONS

Air intake front.

Optional

02260	Extra cab insulation	06614	Anti-dust blow-up shield
03648	Cyclonic air intake high		

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline up to 300,000 km and 1st year breakdown.; ITS service.

Optional

08311	Service interval extended
-------	---------------------------

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569	Lifting jack
-------	--------------

OPTION PACKAGES

Optional


17448	Safety pack	17595	Executive Pack XD/XF
10278	Efficiency Plus Pack XD		



Go to **DAF.com** to configure your own perfect DAF.

XD 300

FAS 6X2 Rigid, double mounted trailing axle

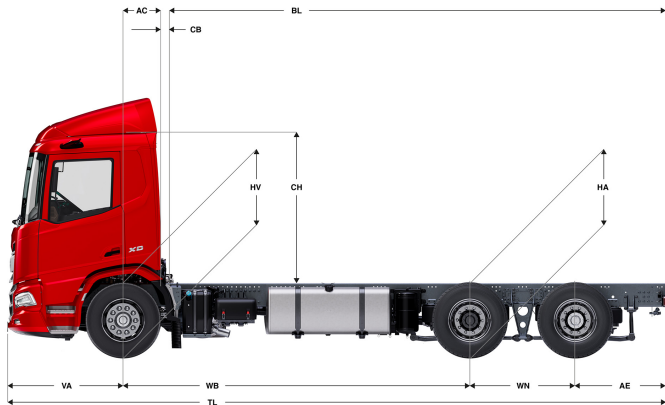



	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions																
	WB	AE ²⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾							
DAY CAB	3,80	2,05	4694	2929	7623	2306	16071	18377	0,50	0,07	2,01	6,08	7,23	8,78	1,02	0,99	14,93	16,34							
	4,20	2,40	4701	3012	7713	2299	15988	18287	0,50	0,07	2,01	6,75	8,02	9,53	1,02	0,99	15,97	17,40							
	4,40	2,55	4713	3070	7783	2287	15930	18217	0,50	0,07	2,01	7,07	8,41	9,88	1,02	0,99	16,49	17,92							
	4,60	2,75	4697	3059	7756	2303	15941	18244	0,50	0,07	2,06	7,40	8,78	10,28	0,97	0,94	17,01	18,45							
	4,80	2,90	4683	3081	7764	2317	15919	18236	0,50	0,07	2,06	7,74	9,15	10,63	0,97	0,94	17,53	18,98							
	5,05	2,90	4694	3090	7783	2306	15910	18217	0,50	0,07	2,06	8,14	9,65	10,88	0,97	0,94	18,19	19,64							
	5,30	2,90	4707	3100	7808	2293	15900	18192	0,50	0,07	2,06	8,57	10,14	11,13	0,97	0,94	18,84	20,30							
SLEEPER CAB	5,60	2,85	4762	3185	7947	2238	15815	18053	0,50	0,07	2,01	9,08	10,74	11,38	1,02	0,99	19,63	21,10							
	5,90	2,80	4781	3191	7972	2219	15809	18028	0,50	0,07	2,01	9,60	11,33	11,63	1,02	1,00	20,41	21,89							
	4,20	2,40	4803	3014	7817	2197	15986	18183	0,83	0,07	2,01	6,13	7,41	9,53	1,02	0,99	15,97	17,40							
	4,40	2,55	4814	3073	7887	2186	15927	18113	0,83	0,07	2,01	6,46	7,80	9,88	1,02	0,99	16,49	17,92							
	4,60	2,75	4798	3061	7860	2202	15939	18140	0,83	0,07	2,06	6,79	8,17	10,28	0,97	0,94	17,01	18,45							
	4,80	2,90	4785	3083	7868	2215	15917	18132	0,83	0,07	2,06	7,11	8,55	10,63	0,97	0,94	17,53	18,98							
	5,05	2,90	4795	3092	7887	2205	15908	18113	0,83	0,07	2,06	7,53	9,05	10,88	0,97	0,94	18,19	19,64							
SLEEPER HIGH CAB	5,30	2,90	4809	3102	7912	2191	15898	18088	0,83	0,07	2,06	7,96	9,53	11,13	0,97	0,94	18,84	20,30							
	5,60	2,85	4864	3187	8051	2136	15813	17949	0,83	0,07	2,01	8,48	10,14	11,38	1,02	0,99	19,63	21,10							
	5,90	2,80	4883	3193	8076	2117	15807	17924	0,83	0,07	2,01	8,99	10,74	11,63	1,02	0,99	20,41	21,89							
	4,20	2,40	4833	3014	7847	2167	15986	18153	0,83	0,07	2,49	6,14	7,42	9,53	1,02	0,99	15,97	17,40							
	4,40	2,55	4844	3072	7917	2156	15928	18083	0,83	0,07	2,49	6,47	7,82	9,88	1,02	0,99	16,49	17,92							
	4,60	2,75	4829	3061	7889	2171	15939	18111	0,83	0,07	2,54	6,80	8,19	10,28	0,97	0,94	17,01	18,45							
	4,80	2,90	4815	3083	7898	2185	15917	18102	0,83	0,07	2,54	7,12	8,57	10,63	0,97	0,94	17,53	18,98							
SLEEPER HIGH CAB	5,05	2,90	4826	3091	7917	2174	15909	18083	0,83	0,07	2,54	7,54	9,07	10,88	0,97	0,94	18,19	19,64							
	5,30	2,90	4839	3102	7942	2161	15898	18058	0,83	0,07	2,54	7,98	9,54	11,13	0,97	0,94	18,84	20,30							
	5,60	2,85	4894	3187	8081	2106	15813	17919	0,83	0,07	2,49	8,49	10,16	11,38	1,02	0,99	19,63	21,10							
	5,90	2,80	4913	3193	8105	2087	15807	17895	0,83	0,07	2,49	9,01	10,76	11,63	1,02	0,99	20,41	21,89							
OTHER DIMENSIONS																			VA: 1,53	WN: 1,40	HV ¹²⁾ : 0,98	HV ¹³⁾ : 0,93	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle (trailing axle down).
9) Laden height at centre of driven axle(s).
10) TK = turning circle between kerbs.
11) TW = turning circle between walls.
12) Unladen height at centre of front axle(s).
13) Laden height at centre of front axle(s).
14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.