


Specification sheet

XB 230

FA 4X2 Rigid, 19t



067F5803AAAA - 202501H - 18-09-2024

ENGINES
XB NewGen 230 PX-7 (167 kW / 227 hp)
XB NewGen 260 PX-7 (189 kW / 257 hp)
XB NewGen 290 PX-7 (212 kW / 287 hp)
XB NewGen 310 PX-7 (227 kW / 308 hp)

GVM ¹⁾	GCM ²⁾
18500 kg	19000 kg
Max. front 7000 kg	
Max. rear 11500 kg	

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror; Rear view camera.

Optional

02576	Extended Day Cab	02083	Two hazard beacon lights LED
02106	Sleeper Cab	07343	Kerb view window co-driver door
01605	Cab suspension mechanically reinforced	00915	Side no glass / rear single glass
09983	Fog lights	09101	Green tinted glass, heated
09984	Fog lights and cornering lights	09283	Mirror brackets, body 2.40-2.50 m
06629	Two hazard beacon lights		

AERODYNAMICS

Optional

09286	Roof air deflector prepared	07092	Adjustable roof air deflector low (set)
06776	Adjustable roof air deflector	09287	Side collars prepared
07109	Adjustable roof air deflector high (set)	07112	Side collars long (set)

COLOURS

; Head lamp panel and bumper: Stone Grey; Lower step cover, cab steps and wing Stone Grey.; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	00617	Lower step cover, cab steps and wing in cab colour
00733	Lower step cab colour, cab steps and wing Grey	16153	Cab and chassis colours

CAB INTERIOR

Left-hand drive (LHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

01847	Right-hand drive (RHD)	04346	Lower bunk, normal level
09271	Steering wheel, leather, colour black	03703	Auxiliary cab heater Air Top 2000
03516	Pneumatically adjustable steering column	04246	Roof hatch, manual control
00967	Seat belts red	04258	Roof hatch, electric control
16158	Seat types		

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C version G2V2; Driver Performance Assistant.

Optional

16155	Audio equipment, makes and types
--------------	----------------------------------

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Drive-off Assist.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	01723	No reverse warning
07414	Reverse warning with self-adjusting volume	16156	EC-ADR packages

SUSPENSION AND AXLES

Front axle type 152N, 100 mm vertical offset. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 7.5 tonnes.; Single reduction driven rear axle type SR1132 with parabolic leaf suspension, including shock absorbers and stabiliser. Max. load 11.5 tonnes..

Optional

04525	Rear: 11.50 t, asymmetric parabolic, SR1132	01372	Rear springs air
06870	Rear: 11.50 t, air suspension, SR1132	00369	Rear springs parabolic, asymmetric
03575	Rear: 13.00 t, air suspension, SR1344	01778	Rear axle load 13.00 t

WHEELS AND TYRES

Front axle(s): 295/80R22.5; Driven rear axle(s): 295/80R22.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764	Wheel protection rings black	16152	Tyre makes and types
06766	Wheel protection rings chromium DAF		

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; Manual gearbox, 6 speeds; Gearbox ratio 6.75-0.78; Rear axle ratio 5.13.

Optional

04393	Manual gearbox, 9 speeds	02810	Rear axle ratio 4.11
07667	Automatic gearbox PowerLine, 8-speed	02808	Rear axle ratio 4.56
09888	Automatic gearbox, 5 speeds	00743	Rear axle ratio 4.63
02313	Gearbox direct drive	02813	Rear axle ratio 5.14
03702	Rear axle ratio 3.70	03431	Rear axle ratio 5.57
01879	Rear axle ratio 3.73	03315	Rear axle ratio 5.63
02800	Rear axle ratio 4.10	02843	Mechanical differential lock

BRAKE SYSTEM

Exhaust brake.

Optional

06195	Park brake control with test position	09525	Park brake ctl with test pos and spoken warning
09524	Park brake control with spoken warning		

CHASSIS

Wheelbase 3.75 m / rear overhang 1.63 m; Side member height 270 mm; EAS unit right, discharge right rearward; Battery box left, no spare wheel carrier; Plastic fuel tank 200 l; Tank for AdBlue® 30 l, right-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

04439	Battery box left, spare wheel carrier right	07071	Spare wheel carrier right-hand side
01623	Rear underrun protection	03323	Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

- | | |
|--|--|
| 06779 Cross member D85-Dc70 -V25, no coupling, mounted | 04638 Trailer coupling D= 8.5 |
| 01433 Cross member D100-Dc70-V25, no coupling, mounted | 04661 D-value cross member D= 8.5 |
| 06657 Cross member D85-Dc70 -V25, coupling D85, mounted | 01948 D-value cross member D=10 |

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis; Standard body attachment hole pattern.

Optional

- | | |
|---|---|
| 09952 BodyBuilder Module (BBM) full | 01502 No side marker lights |
| 06691 Application connector on the cab front | 07487 Body attachment BAM 1, loose consoles supply |
| 02950 Application connector for hydraulic platform | 07488 Body attachment BAM 3, loose consoles supply |
| 09240 Application connector for refuse collector | |

POWER TAKE-OFF (PTO)

Optional

- | | |
|--|--|
| 00590 Front engine PTO with generator preparation 17 kW | 01250 Front engine PTO with generator preparation 30 kW |
| 06785 Front engine PTO, generator preparation 22.5 kW | 06282 Rear eng PTO 13h, permanent, pump drive |
| 00591 Front engine PTO with generator preparation 24 kW | 16148 PTO types and positions |

24V POWER SUPPLY

Alternator 100 A, batteries 2x 175 Ah..

Optional

- | | |
|------------------------------|--------------------------------|
| 02544 Alternator 80 A | 01906 Batteries 2x125Ah |
|------------------------------|--------------------------------|

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related technical GCM equal to GVM.

Optional

- | | |
|---|---|
| 00064 Driveline related max GCM 22500 kg | 00620 Driveline related max GCM 28000 kg |
| 02658 Driveline related max GCM 26000 kg | 03027 Driveline related max GCM 32000 kg class 3 |

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

- | | |
|---|---|
| 02270 Cold climate | 04482 Air intake high behind cab |
| 04767 Moisture separator, heated | 09960 Air intake on the cab roof |

VEHICLE DELIVERY

Standard toolkit.



Optional

- | |
|-------------------------------------|
| 06491 Toolkit Eastern Europe |
|-------------------------------------|

Go to **DAF.com** to configure your own perfect DAF.

XB 230

FA 4X2 Rigid, 19t

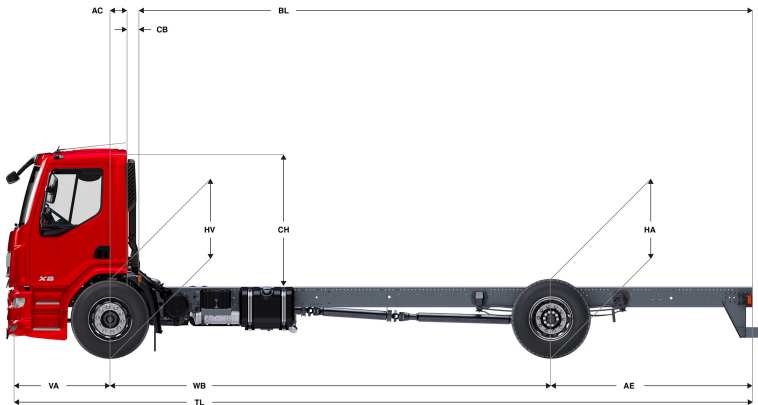

Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
3,45	1,48	3214	1580	4795	3786	9920	13705	0,22	0,12	1,88	4,15	4,15	6,32	1,05	0,84	12,96	14,09
3,75	1,63	3227	1614	4841	3773	9886	13659	0,22	0,12	1,88	4,57	4,57	6,76	1,05	0,84	13,77	14,92
4,15	1,83	3229	1642	4871	3771	9858	13629	0,22	0,12	1,88	5,12	5,12	7,36	1,04	0,84	14,86	16,03
4,45	1,98	3238	1671	4909	3762	9829	13591	0,22	0,12	1,88	5,53	5,53	7,81	1,04	0,84	15,69	16,86
4,75	2,13	3240	1691	4931	3760	9809	13569	0,22	0,12	1,88	5,96	5,96	8,26	1,04	0,84	16,51	17,69
5,00	2,25	3253	1718	4971	3747	9782	13530	0,22	0,12	1,88	6,30	6,30	8,64	1,04	0,84	17,19	18,39
5,30	2,40	3256	1736	4992	3744	9764	13508	0,22	0,12	1,88	6,72	6,72	9,09	1,04	0,84	18,02	19,22
5,85	2,68	3290	1816	5106	3710	9684	13394	0,22	0,12	1,88	7,49	7,49	9,91	1,04	0,84	19,53	20,75
6,25	2,88	3296	1843	5139	3704	9657	13361	0,22	0,12	1,88	8,04	8,04	10,51	1,04	0,84	20,63	21,86
6,60	2,85	3319	1860	5179	3681	9640	13321	0,22	0,12	1,88	8,54	8,54	10,84	1,04	0,84	21,60	22,83
6,90	3,00	3338	1901	5239	3662	9599	13261	0,22	0,12	1,88	8,96	8,96	11,29	1,04	0,84	22,43	23,66
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
3,45	1,48	3356	1563	4919	3644	9937	13581	0,62	0,07	1,88	3,50	3,50	6,32	1,05	0,84	12,96	14,09
3,75	1,63	3368	1598	4966	3632	9902	13534	0,62	0,07	1,88	3,92	3,92	6,76	1,05	0,84	13,77	14,92
4,15	1,83	3368	1628	4995	3632	9872	13505	0,62	0,07	1,88	4,48	4,48	7,36	1,05	0,84	14,86	16,03
4,45	1,98	3376	1658	5034	3624	9842	13467	0,62	0,07	1,88	4,91	4,91	7,81	1,04	0,84	15,69	16,86
4,75	2,13	3377	1679	5056	3623	9821	13444	0,62	0,07	1,88	5,31	5,31	8,26	1,04	0,84	16,51	17,69
5,00	2,25	3389	1706	5095	3611	9794	13405	0,62	0,07	1,88	5,68	5,68	8,64	1,04	0,84	17,19	18,39
5,30	2,40	3391	1726	5117	3609	9774	13383	0,62	0,07	1,88	6,09	6,09	9,09	1,04	0,84	18,02	19,22
5,85	2,68	3425	1806	5230	3575	9694	13270	0,62	0,07	1,88	6,87	6,87	9,91	1,04	0,84	19,53	20,75
6,25	2,88	3430	1834	5264	3570	9666	13236	0,62	0,07	1,88	7,43	7,43	10,51	1,04	0,84	20,63	21,86
6,60	2,85	3453	1851	5304	3547	9649	13197	0,62	0,07	1,88	7,93	7,93	10,84	1,04	0,84	21,60	22,83
6,90	3,00	3470	1893	5364	3530	9607	13137	0,62	0,07	1,88	8,36	8,36	11,29	1,04	0,84	22,43	23,66

OTHER DIMENSIONS	VA: 1,39	HV ¹³⁾ : 1,01	HV ¹⁴⁾ : 0,92	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,45
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

A PACCAR COMPANY

DRIVEN BY QUALITY

DAF

067F5803AAAA - 202501H - 18-09-2024