

Specification sheet

XB 230

FT 4X2 Tractor, 13t



ENGINES
XB NewGen 230 PX-7 (167 kW / 227 hp)
XB NewGen 260 PX-7 (189 kW / 257 hp)
XB NewGen 290 PX-7 (212 kW / 287 hp)

GVM ¹⁾	GCM ²⁾
13000 kg	21000 kg
Max. front 4500 kg	
Max. rear 9400 kg	

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

02576 Extended Day Cab	07343 Kerb view window co-driver door
02106 Sleeper Cab	
09983 Fog lights	09282 Mirror brackets, body 2.30-2.40 m
09984 Fog lights and cornering lights	09283 Mirror brackets, body 2.40-2.50 m

AERODYNAMICS

Optional

09286 Roof air deflector prepared	07092 Adjustable roof air deflector low (set)
06776 Adjustable roof air deflector	09287 Side collars prepared
	07112 Side collars long (set)
07109 Adjustable roof air deflector high (set)	

COLOURS

; Head lamp panel and bumper: Stone Grey; Lower step cover, cab steps and wing Stone Grey.; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	00617 Lower step cover, cab steps and wing in cab colour
00733 Lower step cab colour, cab steps and wing Grey	16153 Cab and chassis colours

CAB INTERIOR

Left-hand drive (LHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel; Air conditioning.

Optional

01847 Right-hand drive (RHD)	03703 Auxiliary cab heater Air Top 2000
09271 Steering wheel, leather, colour black	04246 Roof hatch, manual control
03516 Pneumatically adjustable steering column	04258 Roof hatch, electric control
04346 Lower bunk, normal level	

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C version G2V2; Driver Performance Assistant.

Optional

16155 Audio equipment, makes and types

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Vehicle Stability Control (VSC); Drive-off Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	01723 No reverse warning
07414 Reverse warning with self-adjusting volume	16156 EC-ADR packages

SUSPENSION AND AXLES

Front axle type F60. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 4.5 tonnes.; Single reduction driven rear axle type SR10.26 with adjustable electronically controlled 2-bellow air suspension, including shock absorbers and stabiliser. Max. load 9.8 tonnes..

WHEELS AND TYRES

Front axle(s): 265/70R19.5; Driven rear axle(s): 265/70R19.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764 Wheel protection rings black	16152 Tyre makes and types
---	-----------------------------------

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; Manual gearbox, 6 speeds; Gearbox ratio 6.75-0.78; Rear axle ratio 4.56.

Optional

04393 Manual gearbox, 9 speeds	01878 Rear axle ratio 3.31
07667 Automatic gearbox PowerLine, 8-speed	02800 Rear axle ratio 4.10
02313 Gearbox direct drive	02843 Mechanical differential lock

BRAKE SYSTEM

Exhaust brake.

Optional

09525 Park brake ctl with test pos and spoken warning
--

CHASSIS

Wheelbase 3.50 m / rear overhang 0.83 m; Side member height 270 mm; EAS unit right, discharge right rearward; Battery box left, no spare wheel carrier; Plastic fuel tank 170 l; Tank for AdBlue® 30 l, right-hand side chassis; Front underrun protection (FUP); Catwalk with step, extra long; Spray suppression.

Optional

03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

00271 Towing hook D= 43 kN	06584 Pneumatic trailer connection palm type
-----------------------------------	---

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

POWER TAKE-OFF (PTO)

Optional

06282 Rear eng PTO 13h, permanent, pump drive	16148 PTO types and positions
--	--------------------------------------

24V POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional**01897** Alternator 100 A**08797** Batteries 2x175Ah**GVM AND GCM**

Chassis weight related technical GVM max 13000 kg; Driveline related max GCM 21000 kg.

Optional**00738** Driveline related max GCM 24000 kg**00620** Driveline related max GCM 28000 kg**02658** Driveline related max GCM 26000 kg**APPLICATION CONDITIONS**

Moisture separator, unheated; Air intake high behind cab.

Optional**02270** Cold climate**04767** Moisture separator, heated**SERVICE AND MAINTENANCE**

Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline up to 200,000 km and 1st year breakdown.; ITS service.

VEHICLE DELIVERY


Standard toolkit.

Optional**06491** Toolkit Eastern Europe

Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XB 230

FT 4X2 Tractor, 13t

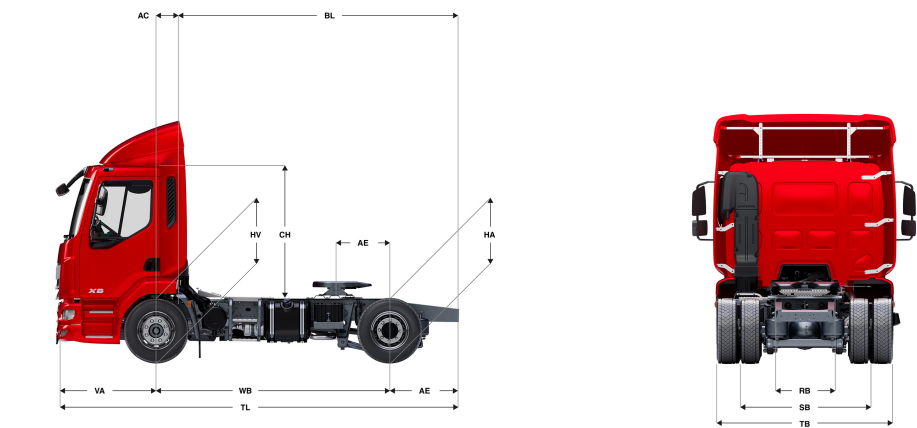

Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
DAY CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA ⁶⁾	TL	HA ⁷⁾	HA ⁸⁾	TK ⁹⁾	TW ¹⁰⁾
	3,13	0,83	2995	1354	4350	1505	8046	8651	0,27	3,69	1,88	0,00	5,30	0,94	0,92	11,08	12,29
	3,50	0,83	3011	1379	4390	1489	8021	8610	0,27	4,06	1,88	0,00	5,67	0,94	0,92	11,99	13,22
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA ⁶⁾	TL	HA ⁷⁾	HA ⁸⁾	TK ⁹⁾	TW ¹⁰⁾
	3,13	0,83	3135	1342	4477	1365	8058	8524	0,67	3,29	1,88	0,00	5,30	0,94	0,91	11,08	12,29
	3,50	0,83	3149	1368	4517	1351	8032	8483	0,67	3,66	1,88	0,00	5,67	0,94	0,92	11,99	13,22

OTHER DIMENSIONS	VA: 1,34	HV ¹¹⁾ : 0,96	HV ¹²⁾ : 0,84	RB: 0,79	SB: 1,75	TB ¹³⁾ : 2,35
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB.

6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).

8) Laden height at centre of driven axle(s).

9) TK = turning circle between kerbs.

10) TW = turning circle between walls.

11) Unladen height at centre of front axle(s).

12) Laden height at centre of front axle(s).

13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.