


Specification sheet

XF 430

FAT 6X4 Rigid



ENGINES
XF 430 MX-13 (315 kW / 428 hp)
XF 480 MX-13 (355 kW / 483 hp)
XF 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
26000 kg	44000 kg
Max. front 7000 kg	
Max. rear 20000 kg	

067F0749AAAA - 202217B - 14-01-2022

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Space Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2490 mm.; Cab suspension mechanical; LED daytime running lights; Front view mirror; Central door lock system, 2 keys, 2 RC units.

Optional

03710	Comfort Cab	09982	No auxiliary lights in the bumper
01760	Super Space Cab	09984	Fog lights and cornering lights
01226	Cab suspension air	06593	Skylights
01174	External sun visor green translucent	06628	One hazard beacon light at co-driver side
00847	Air horns, single set	06627	One hazard beacon light at driver side
09006	Air horns, double set	06629	Two hazard beacon lights
08020	LED head lights		

AERODYNAMICS

Optional

08823	Adj. roof air deflector Space Cab; over 4 m (!)	06160	Fixed roof air deflector for Super Space Cab
06776	Adjustable roof air deflector	06904	Fixed rf deflector; total height over 4 m
08822	Adj. roof air deflector for Space Cab	04906	Side collars

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

07801	Cab steps and wing in cab colour	07901	Air intake grid cab colour
-------	----------------------------------	-------	----------------------------

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Delta black; Driver seat: Comfort Air; Co-driver seat: basic; Lower bunk without drawer; Automatic Temperature Control and aircoc; Auxiliary cab heater (water); Pollen filter.

Optional

09271	Steering wheel, leather, colour black	07743	Co-driver seat: Luxury Air
07240	Steering wheel, leather, Exclusive	07746	Co-driver seat: Super Air
07152	Cab interior trim colour Exclusive	07748	Co-driver seat: Xtra Leather Air
07592	Cab interior decoration Argenta	00967	Seat belts red
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	09603	Lower bunk with drawer 65 litres
07736	Driver seat: Super Air	06784	Lower bunk mattress Xtra Comfort
07737	Driver seat: Xtra Leather Air	06676	PL light in cab ceiling
07741	Co-driver seat: Comfort Air	06970	Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEBs-3.

Optional

09681	Preparation for Maut	06991	Predictive Cruise Control
07117	Radio/USB player, 2 speakers	06992	Predictive Cruise Control lite
07261	TruckPhone		

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	09827	Side camera system
07011	DAF Night Lock	01725	Reverse warning
09828	Front camera system		

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear: 2x 13.00 t, air suspension, SR1360T.

Optional

06257	Front axle load 9.00 t	04549	Rear axle load 10.50+ 10.50 t
07494	Rear axle HR1670T		
01601	Rear springs trapezium	08191	Axle load monitoring

WHEELS AND TYRES

Front axle(s): 315/80R22.5; Driven rear axle(s): 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152	Tyre makes and types
-------	----------------------

DRIVELINE

Engine MX-13, multi torque 6 cylinder diesel engine, 12.9 litres. Output 315 kW (428 hp) at 1600 rpm. Maximum torque 2300 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 3.09.

Optional

04523	Manual gearbox, 16 speeds	02314	Gearbox overdrive
07103	Automated gearbox, TraXon, 16 speeds		

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921	MX Engine Brake	02715	ZF Intarder
-------	-----------------	-------	-------------

CHASSIS

Wheelbase 5.55 m / rear overhang 3.20 m; Side member height 310 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l RH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

07070	Spare wheel carrier left-hand side	03323	Rear light with LEDs
-------	------------------------------------	-------	----------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	04659	Trailer cable EBS
08026	Trailer coupling Rockinger D=13.0		

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

09050 Application connectors for bb remote control	06692 Application connector chassis
--	-------------------------------------

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 230 Ah..

Optional

06460 Alternator 120 A	07671 Batteries 2x210Ah AGM C-type
08775 Alternator 150 A	

GVM AND GCM

Chassis weight related technical GVM max 33000 kg; Driveline related max GCM 61000 kg class 2.

Optional

00778 Driveline related max GCM 58000 kg class 2	01313 Driveline related max GCM 70000 kg class 2
00818 Driveline related max GCM 60000 kg class 3	02135 Driveline related max GCM 71000 kg class 2
06280 Driveline related max GCM 63000 kg class 2	02143 Driveline related max GCM 78000 kg class 2

APPLICATION CONDITIONS

Air intake high.

Optional

03646 Air intake front	03648 Cyclonic air intake high
------------------------	--------------------------------

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle (excl. real wear parts), 2nd and 3rd year driveline up to 300,000 km and 1st year breakdown.; ITS service.

Optional



08311 Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XF 430

FAT 6X4 Rigid

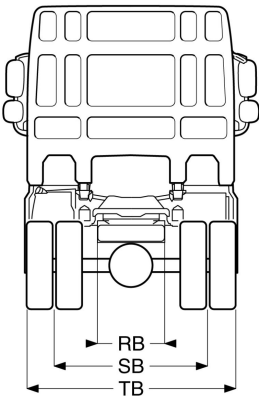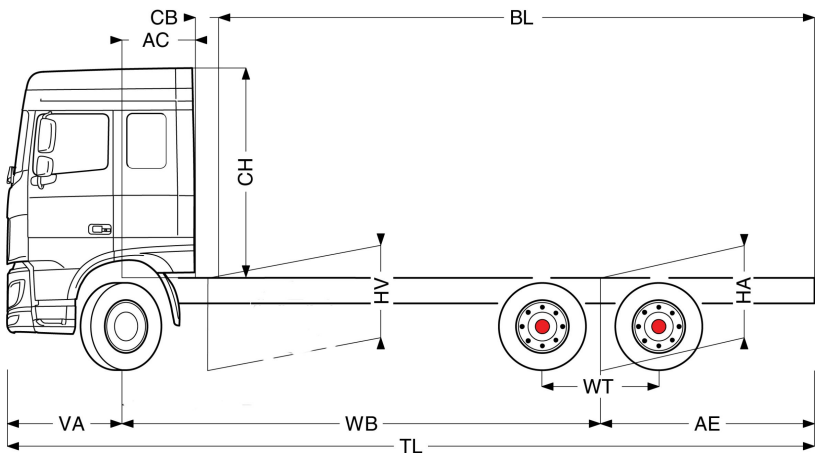

	Wheelbase - AE		Unladen weight ⁴⁾			Gross Carrying Capacity			Variable dimensions									
SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	2,65	4971	4025	8997	2029	15975	17003	0,88	0,28	2,51	4,83	5,30	8,07	1,03	1,01	14,15	15,52
	4,55	2,90	5024	4107	9131	1976	15893	16869	0,88	0,28	2,51	5,73	6,25	8,82	1,03	1,01	15,45	16,84
	5,00	3,20	5058	4203	9261	1942	15797	16739	0,88	0,28	2,51	6,53	7,12	9,57	1,03	1,01	16,62	18,03
	5,55	3,20	5149	4237	9386	1851	15763	16614	0,88	0,28	2,51	7,56	8,21	10,12	1,03	1,01	18,05	19,48
SUPER SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
	4,05	2,65	5039	4033	9072	1961	15967	16928	0,88	0,28	2,89	4,86	5,33	8,07	1,03	1,01	14,15	15,52
	4,55	2,90	5092	4114	9206	1908	15886	16794	0,88	0,28	2,89	5,76	6,29	8,82	1,03	1,01	15,45	16,84
	5,00	3,20	5127	4209	9336	1873	15791	16664	0,88	0,28	2,89	6,57	7,16	9,57	1,03	1,01	16,62	18,03
	5,55	3,20	5219	4243	9461	1781	15757	16539	0,88	0,28	2,89	7,60	8,26	10,12	1,03	1,01	18,05	19,48

OTHER DIMENSIONS	VA: 1,37	WT: 1,40	HV ¹²⁾ : 1,04	HV ¹³⁾ : 1,00	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
2) GCM in conformity with registration documents.
3) Axle load with standard tyre size.
4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
6) CB is based on standard air intake and/or exhaust.
7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).
9) Laden height at centre of driven axle(s).
10) TK = turning circle between kerbs.
11) TW = turning circle between walls.
12) Unladen height at centre of front axle(s).
13) Laden height at centre of front axle(s).
14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.