


Specification sheet

LF 150

FA 4X2 Rigid, 08t City



ENGINES
LF 150 PX-4 (115 kW / 156 hp)
LF 170 PX-4 (127 kW / 172 hp)

GVM ¹⁾	GCM ²⁾
7500 kg	7500 kg
Max. front 3600 kg	
Max. rear 5000 kg	

067F2602AAAA - 202217B - 14-01-2022

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

01174	External sun visor green translucent	03605	Mirror brackets, body 2.10-2.29 m
07343	Kerb view window co-driver door	09282	Mirror brackets, body 2.30-2.40 m
00915	Side no glass / rear single glass	09283	Mirror brackets, body 2.40-2.50 m

AERODYNAMICS

Optional

09287	Side collars prepared	07112	Side collars long (set)
04906	Side collars	07093	Side collars short (set)

COLOURS

; Head lamp panel and bumper: Stone Grey; Cab steps and wing Stone Grey; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	16153	Cab and chassis colours
01109	Cab steps and wing in cab colour		

CAB INTERIOR

Left-hand drive (LHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

01847	Right-hand drive (RHD)	02600	Co-driver seat: air suspended
09271	Steering wheel, leather, colour black	09106	Dual mate seat, luxury version
03516	Pneumatically adjustable steering column	00967	Seat belts red
00072	Dual mate seat, velour	02213	Air conditioning

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C; Scale speedometer km/h; Adaptive Cruise Control with FCW and AEBS-3.

Optional

01936	Scale speedometer km/h + m/h	16155	Audio equipment, makes and types
09210	Scale speedometer m/h + km/h	07261	TruckPhone

SAFETY AND SECURITY

Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	06634	Immobiliser 5 minutes and alarm (SCM BV03-B2)
01725	Reverse warning	06635	Immobiliser 15 minutes and alarm (SCM BV03-B3)
07414	Reverse warning with self-adjusting volume		
06633	Immobiliser 5 minutes (SCM BV03-B1)	16156	EC-ADR packages

SUSPENSION AND AXLES

Front: 3.60 t, parabolic, F36; Rear: 5.00 t, parabolic, SR5.10.

Optional

07368	Front springs parabolic, Heavy Duty	08031	Rear springs parabolic, Heavy Duty
01372	Rear springs air		

WHEELS AND TYRES

Front axle(s): 215/75R17.5; Driven rear axle(s): 215/75R17.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764	Wheel protection rings black	16152	Tyre makes and types black
-------	------------------------------	-------	----------------------------

DRIVELINE

Engine PX-4, 4 cylinder diesel engine, 3.8 litres. Output 115 kW (156 hp) at 2600 rpm. Max. torque 500 Nm at 1200-1900 rpm.; Exhaust emission Euro 6; Manual gearbox, 5 speeds; Gearbox ratio 5.76-0.77; Rear axle ratio 3.73.

Optional

07383	Engine PX-4, 127 kW/172 hp. Cab Badge: 170
-------	--

BRAKE SYSTEM

Exhaust brake.

CHASSIS

Wheelbase 4.30 m / rear overhang 2.32 m; Side member height 210 mm; EAS unit right, discharge right rearward; Plastic fuel tank 110 l; Tank for AdBlue® 25 l, right-hand side chassis; Spray suppression.

Optional

02001	Plastic fuel tank 155 l	07071	Spare wheel carrier right-hand side
02124	Plastic fuel tank 185 l		
02011	Spare wheel carrier in rear overhang	03323	Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member.

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

02597	Application connector for tail lift control	07487	Body attachment BAM 1, loose consoles supply
01503	Side marker lights	07488	Body attachment BAM 3, loose consoles supply

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional

01897	Alternator 100 A	08797	Batteries 2x175Ah
-------	------------------	-------	-------------------

GVM AND GCM

Chassis weight related technical GVM max 7500 kg; Driveline related technical GCM equal to GVM.

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

04767	Moisture separator, heated	04987	Radiator flyscreen
09960	Air intake on the cab roof		

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle (excl. real wear parts), 2nd and 3rd year driveline up to 200,000 km and 1st year breakdown.; ITS service.

VEHICLE DELIVERY


Standard toolkit.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

LF 150

FA 4X2 Rigid, 08t City

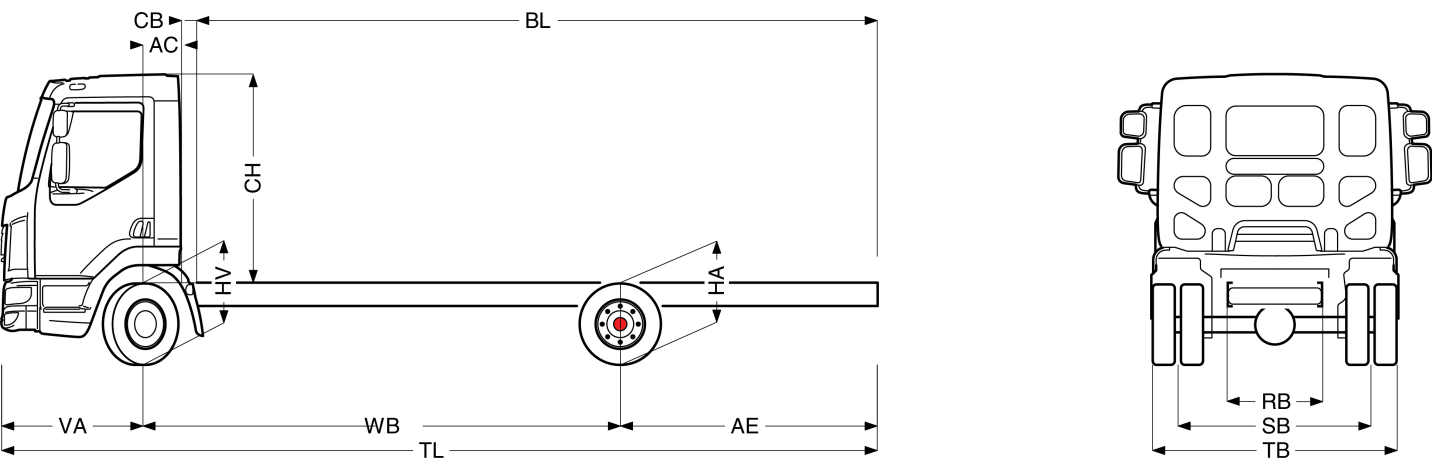

	Wheelbase - AE		Unladen weight ⁴⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	3,05	1,80	2361	804	3165	1239	4196	4335	0,33	0,12	1,84	3,46	5,00	6,13	1,05	0,90	10,57	11,90
	3,15	1,62	2366	795	3160	1234	4205	4340	0,33	0,12	1,84	3,62	5,20	6,05	1,05	0,91	10,81	12,15
	3,55	1,87	2372	827	3198	1228	4173	4302	0,33	0,12	1,84	4,18	5,98	6,70	1,05	0,91	11,78	13,14
	3,90	2,12	2371	846	3216	1229	4154	4284	0,33	0,12	1,84	4,67	6,66	7,30	1,05	0,91	12,63	14,01
	4,30	2,32	2374	863	3238	1226	4137	4262	0,33	0,12	1,84	5,24	7,44	7,90	1,05	0,91	13,61	15,01
	4,65	2,65	2375	889	3264	1225	4111	4236	0,33	0,12	1,84	5,72	8,12	8,58	1,04	0,91	14,47	15,88
	5,00	2,72	2384	900	3284	1216	4100	4216	0,33	0,12	1,84	6,23	8,82	9,00	1,04	0,91	15,33	16,75

OTHER DIMENSIONS	VA: 1,28	HV ¹³⁾ : 0,91	HV ¹⁴⁾ : 0,87	RB: 0,86	SB: 1,74	TB ¹⁵⁾ : 2,28
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.