

Specification sheet

CF 370

FA 4X2 Rigid, Low Deck



067F8709BAAA - 202217B - 14-01-2022

ENGINES
CF 370 MX-11 (270 kW / 367 hp)
CF 410 MX-11 (300 kW / 408 hp)
CF 450 MX-11 (330 kW / 449 hp)
CF 430 MX-13 (315 kW / 428 hp)
CF 480 MX-13 (355 kW / 483 hp)
CF 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
18500 kg	40000 kg
Max. front 7000 kg	
Max. rear 11500 kg	

Greece, ERGOTRAK, www.daftrucks.gr

CAB EXTERIOR

Sleeper Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

01137	Space Cab	09983	Fog lights
01226	Cab suspension air	09984	Fog lights and cornering lights
01174	External sun visor green translucent	06593	Skylights
00847	Air horns, single set	06628	One hazard beacon light at co-driver side
09006	Air horns, double set	06627	One hazard beacon light at driver side
08020	LED head lights	06629	Two hazard beacon lights

AERODYNAMICS

Optional

06776	Adjustable roof air deflector	04906	Side collars
-------	-------------------------------	-------	--------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	09933	Head lamp panel and bumper: Stone Grey
-------	--	-------	--

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch aluminium, manual control.

Optional

09271	Steering wheel, leather, colour black	07743	Co-driver seat: Luxury Air
07240	Steering wheel, leather, Exclusive	07746	Co-driver seat: Super Air
07152	Cab interior trim colour Exclusive	07748	Co-driver seat: Xtra Leather Air
07592	Cab interior decoration Argenta	00967	Seat belts red
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	06784	Lower bunk mattress Xtra Comfort
07736	Driver seat: Super Air	06676	PL light in cab ceiling
07737	Driver seat: Xtra Leather Air	06970	Automatic Cab Climate Control
07741	Co-driver seat: Comfort Air		

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEB-S-3.

Optional

09681	Preparation for Maut	07261	TruckPhone
08450	Luxury speaker system with 6 speakers	06991	Predictive Cruise Control
07117	Radio/USB player, 2 speakers	06992	Predictive Cruise Control lite

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	09827	Side camera system
09828	Front camera system	01725	Reverse warning

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear: 11.50 t, air suspension, SR1344.

Optional

04588	Rear axle SR1347	08191	Axle load monitoring
-------	------------------	-------	----------------------

WHEELS AND TYRES

Front axle(s): 315/60R22.5; Driven rear axle(s): 295/60R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152	Tyre makes and types
-------	----------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1900 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.05.

Optional

04523	Manual gearbox, 16 speeds	07103	Automated gearbox, TraXon, 16 speeds
-------	---------------------------	-------	--------------------------------------

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921	MX Engine Brake	02715	ZF Intarder
-------	-----------------	-------	-------------

CHASSIS

Wheelbase 4.90 m / rear overhang 2.35 m; Side member height 260 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 450 l, height 505 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

07071	Spare wheel carrier right-hand side	03323	Rear light with LEDs
-------	-------------------------------------	-------	----------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	04624	Closing member
08026	Trailer coupling Rockinger D=13.0	07032	D-value cross member D=20

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

04331	Appl connector including air control prep	02597	Application connector for tail lift control
06692	Application connector chassis		

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

06460 Alternator 120 A	07671 Batteries 2x210Ah AGM C-type
08775 Alternator 150 A	06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 19500 kg; Driveline related max GCM 40000 kg class 3.

Optional

00200 Driveline related max GCM 38000 kg class 2	03675 Driveline related max GCM 50000 kg class 3
03673 Driveline related max GCM 44000 kg class 2	

APPLICATION CONDITIONS

Air intake on the cab roof.

Optional

08400 Silent mode	09961 Cyclonic air intake behind the cab
-------------------	--

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle (excl. real wear parts), 2nd and 3rd year driveline up to 500,000 km and 1st year breakdown.; ITS service.

Optional


08311 Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

CF 370

FA 4X2 Rigid, Low Deck

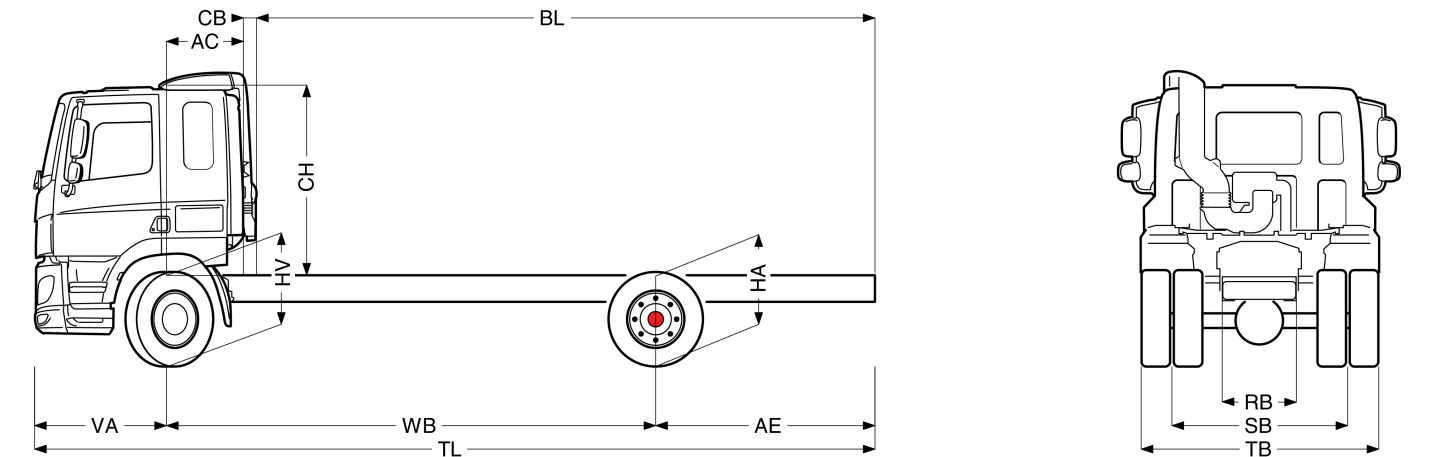

Wheelbase - AE		Unladen weight ⁴⁾			Gross Carrying Capacity			Variable dimensions										
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,90	2,35	4765	1944	6710	2235	9556	11790	0,82	0,16	1,99	5,99	5,99	8,62	0,87	0,88	16,34	17,74
	5,40	2,65	4823	2074	6896	2177	9426	11604	0,82	0,16	1,99	6,82	6,82	9,42	0,87	0,88	17,65	19,06
	5,70	2,85	4834	2118	6952	2166	9382	11548	0,82	0,16	1,99	7,30	7,30	9,92	0,87	0,88	18,43	19,85
	6,10	3,10	4850	2175	7025	2150	9325	11475	0,82	0,16	1,99	7,96	7,96	10,57	0,87	0,88	19,48	20,91
SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,90	2,35	4877	1945	6822	2123	9555	11678	0,82	0,16	2,67	6,06	6,06	8,62	0,87	0,88	16,34	17,74
	5,40	2,65	4935	2074	7008	2065	9426	11492	0,82	0,16	2,67	6,91	6,91	9,42	0,87	0,88	17,65	19,06
	5,70	2,85	4946	2118	7064	2054	9382	11436	0,82	0,16	2,67	7,40	7,40	9,92	0,87	0,88	18,43	19,85
	6,10	3,10	4962	2175	7137	2038	9325	11363	0,82	0,16	2,67	8,06	8,06	10,57	0,87	0,88	19,48	20,91

OTHER DIMENSIONS	VA: 1,37	HV ¹³⁾ : 0,89	HV ¹⁴⁾ : 0,88	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,46
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.