

Specification sheet

CF 370

FAK 8X2 Rigid, double mounted trailing axle



ENGINES
CF 370 MX-11 (270 kW / 367 hp)
CF 410 MX-11 (300 kW / 408 hp)
CF 450 MX-11 (330 kW / 449 hp)
CF 430 MX-13 (315 kW / 428 hp)
CF 480 MX-13 (355 kW / 483 hp)
CF 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
27000 kg	40000 kg
Max. front 7000 kg	
Max. rear 20000 kg	

Greece, ERGOTRAK, www.daftrucks.gr

067F8739KAAA - 202217B - 14-01-2022

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

02106	Sleeper Cab	09983	Fog lights
01137	Space Cab	09984	Fog lights and cornering lights
01226	Cab suspension air	06593	Skylights
01174	External sun visor green translucent	06628	One hazard beacon light at co-driver side
00847	Air horns, single set	06627	One hazard beacon light at driver side
09006	Air horns, double set	06629	Two hazard beacon lights
08020	LED head lights		

AERODYNAMICS

Optional

06776	Adjustable roof air deflector	04906	Side collars
-------	-------------------------------	-------	--------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	09933	Head lamp panel and bumper: Stone Grey
-------	--	-------	--

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch glass, manual control.

Optional

09271	Steering wheel, leather, colour black	07746	Co-driver seat: Super Air
07240	Steering wheel, leather, Exclusive	07748	Co-driver seat: Xtra Leather Air
07152	Cab interior trim colour Exclusive	00967	Seat belts red
07592	Cab interior decoration Argenta	02117	Third seat
07591	Cab interior decoration Rustica	06539	Refrigerator
07733	Driver seat: Luxury Air	06783	Lower bunk foam mattress
07736	Driver seat: Super Air	06784	Lower bunk mattress Xtra Comfort
07737	Driver seat: Xtra Leather Air	06676	PL light in cab ceiling
07741	Co-driver seat: Comfort Air	06970	Automatic Cab Climate Control
07743	Co-driver seat: Luxury Air		

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Cruise control.

Optional

09681	Preparation for Maut	09909	Adaptive Cruise Control (ACC) with FCW
08450	Luxury speaker system with 6 speakers	06991	Predictive Cruise Control
07117	Radio/USB player, 2 speakers	06992	Predictive Cruise Control lite
07261	TruckPhone		

SAFETY AND SECURITY

No Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	09827	Side camera system
09828	Front camera system	01725	Reverse warning

SUSPENSION AND AXLES

Front axles load 9.00 + 8.00 t; Rear: 12.00 + 7.80 t, air suspension, SR1344.

Optional

04057	Rear axle HR1356	04588	Rear axle SR1347
-------	------------------	-------	------------------

WHEELS AND TYRES

Front axle(s): 385/55R22.5; Second front or leading axle: 315/70R22.5; Driven rear axle(s): 315/70R22.5; Second driven rear or trailing axle: 315/70R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152	Tyre makes and types
-------	----------------------

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1900 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38.

Optional

04523	Manual gearbox, 16 speeds	03720	No ASR
07103	Automated gearbox, TraXon, 16 speeds		

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921	MX Engine Brake	02715	ZF Intarder
-------	-----------------	-------	-------------

CHASSIS

Wheelbase 5.30 m / rear overhang 1.55 m; Side member height 310 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 340 l RH, height 620 mm; Tank for AdBlue® 45 l, right-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

06611	Exhaust pipe vertical, high	03323	Rear light with LEDs
-------	-----------------------------	-------	----------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

07033	Trailer coupling Ringfeder D=13.7	08027	Trailer coupling Rockinger D=20.0
07034	Trailer coupling Ringfeder D=20.0	07032	D-value cross member D=20
08026	Trailer coupling Rockinger D=13.0		

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | | | |
|-------|--|-------|-------------------------------|
| 04331 | Appl connector including air control prep | 06692 | Application connector chassis |
| 09050 | Application connectors for bb remote control | | |

POWER TAKE-OFF (PTO)

Optional

- 16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

- | | | | |
|-------|------------------|-------|------------------------------|
| 06460 | Alternator 120 A | 07671 | Batteries 2x210Ah AGM C-type |
| 08775 | Alternator 150 A | 06440 | Batteries 2x230Ah |

GVM AND GCM

Chassis weight related technical GVM max 36000 kg; Driveline related max GCM 40000 kg class 3.

Optional

- | | | | |
|-------|--|-------|--|
| 00200 | Driveline related max GCM 38000 kg class 2 | 00939 | Driveline related max GCM 56000 kg class 2 |
| 03673 | Driveline related max GCM 44000 kg class 2 | 00818 | Driveline related max GCM 60000 kg class 3 |
| 03675 | Driveline related max GCM 50000 kg class 3 | | |

APPLICATION CONDITIONS

Air intake on the cab roof.

Optional

- 09961 Cyclonic air intake behind the cab

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle (excl. real wear parts), 2nd and 3rd year driveline up to 300,000 km and 1st year breakdown.; ITS service.

Optional


- 08311 Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

CF 370

FAK 8X2 Rigid, double mounted trailing axle

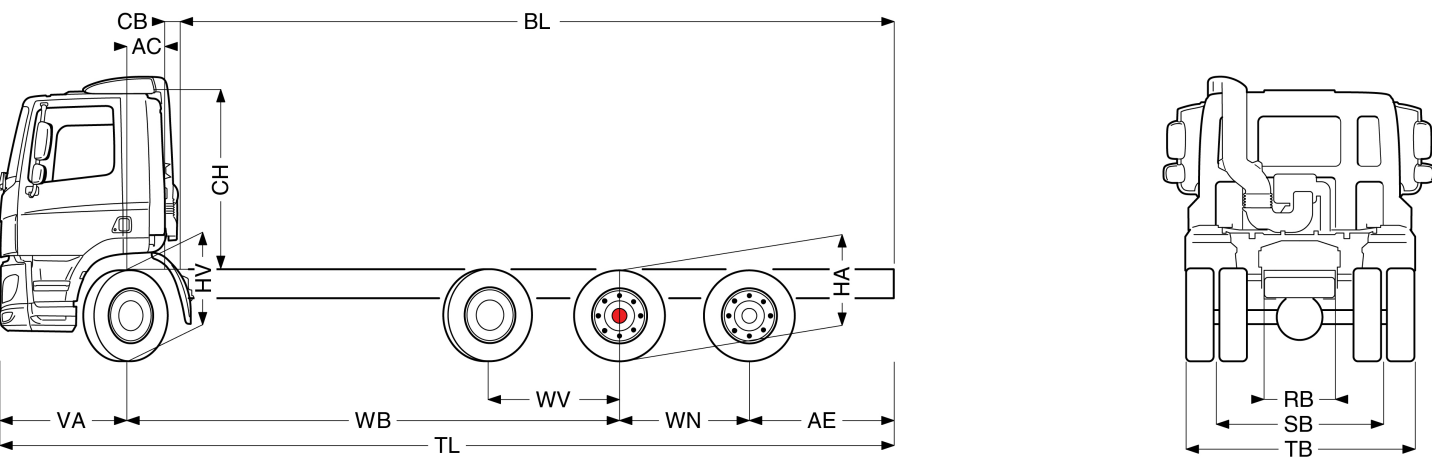

	Wheelbase - AE		Unladen weight ⁴⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	4,70	1,20	4856	4320	9175	2144	15680	17825	0,39	0,18	1,94	7,13	7,13	8,67	1,02	1,01	18,95	20,22
	5,30	1,55	4870	4459	9328	2130	15541	17672	0,39	0,18	1,94	8,18	8,18	9,62	1,02	1,01	20,69	21,98
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,70	1,20	4903	4329	9232	2097	15671	17768	0,82	0,16	1,94	6,33	6,33	8,67	1,02	1,00	18,95	20,22
	5,30	1,55	4918	4467	9385	2082	15533	17615	0,82	0,16	1,94	7,39	7,39	9,62	1,02	1,00	20,69	21,98
SPACE CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,70	1,20	5016	4329	9344	1984	15671	17656	0,82	0,16	2,62	6,39	6,39	8,67	1,02	1,00	18,95	20,22
	5,30	1,55	5031	4467	9497	1969	15533	17503	0,82	0,16	2,62	7,45	7,45	9,62	1,02	1,00	20,69	21,98

OTHER DIMENSIONS	VA: 1,37	WV: 1,41	WN: 1,40	HV ¹³⁾ : 1,02	HV ¹⁴⁾ : 0,96	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle (leading and trailing axles down).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.